

(19) World Intellectual Property  
Organization  
International Bureau




(43) International Publication Date  
1 April 2004 (01.04.2004)

PCT

(10) International Publication Number  
**WO 2004/028041 A1**

- (51) International Patent Classification<sup>7</sup>: **H04B 7/26** (74) Agent: **PARK, Jang-Won**; Jewoo Bldg. 5th Floor, 200, Nonhyun-Dong, Gangnam-Gu, Seoul 135-010 (KR).
- (21) International Application Number: PCT/KR2003/001919 (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 19 September 2003 (19.09.2003) (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
10-2002-0057459  
19 September 2002 (19.09.2002) KR
- (71) Applicant: **LG ELECTRONICS INC.** [KR/KR]; 20, Yoido-Dong, Youngdungpo-Gu, Seoul 150-010 (KR).
- (72) Inventors: **YI, Seung-June**; Daechoeng Apt. 303-403, Gaepo-Dong, Gangnam-Gu, Seoul 135-940 (KR). **LEE, Young-Dae**; Sinan Apt. 419-1501, Changwoo-Dong, Hanam, Gyeonggi-Do 465-711 (KR). **LEE, So-Young**; Twegye 2nd Apt. 366-702, Ogeum-Dong, Gunpo, Gyeonggi-Do 435-758 (KR).
- Published:**  
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: MULTICAST SERVICE PROVIDING METHOD IN MOBILE COMMUNICATION SYSTEM

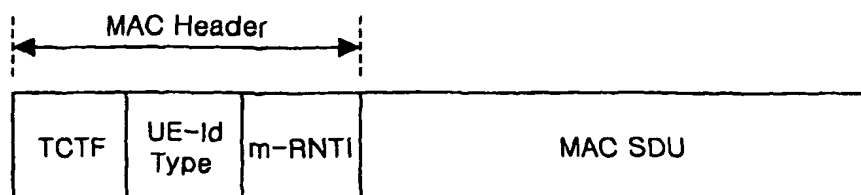

type field (TCTF) and included in a header of the service data (MAC protocol unit).

(57) Abstract: A multimedia service data transmitting method is disclosed. A logical channel indicator is added in service data mapped to a shared channel so that a terminal can discriminate a type of the service data transmitted through the shared channel. The logical channel indicator is a target channel

WO 2004/028041 A1

**MULTICAST SERVICE PROVIDING METHOD IN MOBILE**  
**COMMUNICATION SYSTEM**

**TECHNICAL FIELD**

5

The present invention relates to a method for providing a multimedia broadcast/multicast service (MBMS) of a universal mobile telecommunications system (UMTS), and more particularly, to a method for transmitting multicast data through a downlink shared channel.

10

**BACKGROUND ART**

A universal mobile telecommunications system (UMTS) is a third generation mobile communication system that has evolved from a standard known as Global System for Mobile communications (GSM). This standard is  
15 a European standard which aims to provide an improved mobile communication service based on a GSM core network and wideband code division multiple access (W-CDMA) technology.

Figure 1 shows a network structure of a general UMTS.

As shown in Figure 1, the UMTS is roughly divided into a  
20 terminal(UE : user equipment), a UTRAN and a core network.

The UTRAN includes one or more radio network sub-systems (RNS). Each RNS includes an RNC and one or more Node Bs managed by the RNCs.

Node Bs are managed by the RNCs, receive information sent by the physical layer of a terminal (e.g., mobile station, user equipment and/or subscriber unit) through an uplink, and transmit data to a terminal through a downlink. Node Bs, thus, operate as access points of the UTRAN for a  
5 terminal.

The RNCs perform functions which include assigning and managing radio resources, and operate as an access point with respect to the core network.

A primary function of the UTRAN is constructing and maintaining a  
10 radio access bearer (RAB) for a call connection between the terminal and the core network. The core network applies quality of service (QoS) requirements of end-to-end to the RAB, and accordingly, the UTRAN can satisfy the QoS requirements of the end-to-end by constructing and maintaining the RAB.

The RAB service is divided into an Iu bearer service and a radio  
15 bearer service of a lower concept. The Iu bearer service handles reliable user data transmission between boundary nodes of UTRAN and the core network, while the radio bearer service handles reliable user data transmission between the terminal and UTRAN.

Figure 2 illustrates a radio protocol between the terminal and the  
20 UTRAN on the basis of the 3GPP wireless access network standards.

With reference to Figure 2, the radio access interface protocol includes horizontal layers comprising a physical layer, a data link layer and a network layer, and vertical planes comprising a user plane for transmitting

data information and a control plane for transmitting control signals.

The user plane is a region to which traffic information of a user such as voice or an IP packet is transmitted. The control plane is a region to which control information such as an interface of a network or maintenance and  
5 management of a call is transmitted.

In Figure 2, protocol layers can be divided into a first layer (L1), a second layer (L2) and a third layer (L3) based on three lower layers of an open system interconnection (OSI) standard model well known in the art of communication systems.

10 The first layer (PHY) provides an information transfer service to the upper layer by using various radio transfer techniques.

The first layer is connected to the MAC layer through a transport channel, and data is transferred between the MAC layer and the PHY layer through the transport channel.

15 Data is transmitted according to transmission time interval (TTI) through the transport channel. The physical channel transfers data by dividing it by the unit of certain time called a frame. In order to synchronize the transport channel between the UE and UTRAN, a connection frame number (CFN) is used. The CFN value has the range of 0~255 in case of  
20 transport channels except for a paging channel (PCH). That is, CFN is repeatedly circulated by the period of 256 frames.

Besides the CFN, a system frame number (SFN) is also used to synchronize the physical channel. The SFN value has the range of 0~4095

and repeated by the period of 4096 frames.

The MAC layer provides a re-allocation service of the MAC parameter for allocation and re-allocation of radio resources.

The MAC layer is connected to the radio link control (RLC) layer  
5 (which is an upper layer) through a logical channel, and various logical channels are provided according to the kind of transmitted information. In general, when information of the control plane is transmitted, a control channel is used. When information of the user plane is transmitted, a traffic channel is used.

10 The MAC is classified into an MAC-b sublayer, an MAC-d sublayer and an MAC-c/sh sublayer according to types of managed transport channels. The MAC-b sublayer manages a BCH (Broadcast Channel) handling broadcast of system information, while the MAC-c/sh sublayer manages shared transport channel such as FACH (Forward Access Channel), DSCH  
15 (Downlink Shared Channel), or the like, shared with other terminals.

In UTRAN, the MAC-c/sh sublayer is positioned at a control RNC (CRNC) and manages channels shared by every terminal in a cell, so that one MAC-c/sh sublayer exists in each cell.

The MAC-d sublayer manages a DCH (Dedicated Channel), a  
20 dedicated transport channel for a specific terminal. Accordingly, the MAC-d sublayer is positioned at a serving RNC (SRNC) managing a corresponding terminal, and one MAC-d sublayer exists also at each terminal.

A radio link control (RLC) layer supports a reliable data transmission

and may perform a function of segmentation and concatenation of an RLC service data unit (SDU) coming from a higher layer. The RLC SDU transferred from the higher layer is adjusted in its size according to a throughput capacity at the RLC layer, to which header information is added, and then transferred in a form of a PDU (Protocol Data Unit) to the MAC layer. The RLC layer includes an RLC buffer for storing the RLC SDU or the RLC PDU coming from the higher layer.

A broadcast/multicast control (BMC) layer performs functions of scheduling a cell broadcast message (CB) transferred from the core network and broadcasting the CB to UEs positioned in a specific cell(s). At the side of UTRAN, the CB message transferred from the upper layer is combined with information, such as a message ID, a serial number or a coding scheme, and transferred in a form of BMC message to the RLC layer and to the MAC layer through a CTCH (Common Traffic Channel), a logical channel. In this case, the logical channel CTCH is mapped to a FACH (Forward Access Channel), a transport channel, and an S-CCPCH (Secondary Common Control Physical Channel), a physical channel.

A packet data convergence protocol (PDCP) layer is an upper layer of the RLC layer, allowing data to be transmitted effectively on a radio interface with a relatively small bandwidth through a network protocol such as the IPv4 or the IPv6. For this purpose, the PDCP layer performs a function of reducing unnecessary control information, which is called a header compression, and in this respect, RFC2507 and RFC3095 (robust header

compression: ROHC), a header compression technique defined by an Internet standardization group called an IETF (Internet Engineering Task Force), can be used. In these methods, because the only information requisite for the header part of a data is transmitted, control information is transmitted, so that an amount of data transmission can be reduced.

The RRC layer positioned in the lowest portion of the third layer (L3) is defined only in the control plane and controls the logical channels, the transport channels, and the physical channels in relation to the setup, the reconfiguration, and the release of the RBs. The RB signifies a service provided by the second layer for data transmission between the terminal and UTRAN, and setting up the RB means processes of stipulating the characteristics of a protocol layer and a channel, which are required for providing a specific service, and setting the respective detailed parameters and operation methods.

The MAC-sublayer will now be described.

A primary function of the MAC layer existing between the RLC and the physical layer is mapping the logical channel and the transport channel. The reason is because channel processing methods of the upper layer and the lower layer of the MAC are different. That is, at the upper layer of the MAC, data is processed separately by using the control channel of the control plane and the traffic channel of the user plane according to the content of the data that the channel transmits. Meanwhile, at the lower layer, data is processed separately by using a common channel and a dedicated

channel depending on whether a channel is shared, so inter-channel mapping is important.

Figure 3 illustrates mapping relations between the logical channel and the transport channel at the UE. In case of UTRAN, the directions of  
5 arrows are the opposite.

Another important function of the MAC can be a logical channel multiplexing. In the channel mapping, the MAC maps several logical channels to one transport channel, to thereby obtain a multiplexing gain which heightens an efficiency of the transport channel. Such multiplexing can  
10 provide a remarkably high gain for signaling information transmitting data intermittently and packet data, so that it is used for an SRB (Signaling Radio Bearer) or a packet service (PS) RAB. In case of a circuit service (CS) RAB, because data is continuously transmitted, the multiplexing function is not used.

15 Accordingly, the MAC provides a flexibility in channel selection and an efficiency of a channel resource through the channel mapping and logical channel multiplexing. In this case, in order to support the channel mapping and the logical channel multiplexing, additional functions are required. That is, four functions are additionally performed in the MAC.

20

#### 1. Priority handling

In order to support various channel mapping structures, the MAC performs a priority handling function. The priority handling includes two types:



one is priority handling among several UEs, and the other is priority handling for one UE.

The priority handling among UEs corresponds to a case that data of several UEs are transmitted at the downlink through a common transport  
5 channel (FACH or DSCH). In this case, the MAC first transmits data of a UE with a higher priority. That is, the MAC suitably allocates the common channel to each UE at each transmission time interval (TTI), to thereby heighten an efficiency of the channel resource. This is related to a dynamic scheduling function.

10 A priority handling on one UE corresponds to a case that several logical channels belonging to one UE is mapped to one transport channel. The MAC determines a priority from the logical channel priority. This is related to a transport format combination selection, and the MAC selects a transport format combination that can first transmit data of a logical channel  
15 with a higher priority.

## 2. Transport format combination selection

The MAC transmits transport blocks (TB) to the physical layer through the transport channel. The transport format (TF) means a regulation  
20 for a size and the number of TBs that one transport channel transmits. In determining the TF for a specific transport channel, the MAC should even consider the transport channel multiplexing in the physical layer.

The transport channel multiplexing refers to mapping plural transport

channels to one coded composite transport channel (CCTrCH). Although this function is performed in the physical layer, the MAC should consider every transport channel mapped to the same CCTrCH in determining the TF. Actually, the amount of data processed in the physical layer is the amount of data transmitted through CCTrCH, so the MAC should determine the TF of each transport channel in consideration of CCTrCH. In this case, a combination of TF is called a transport format combination (TFC). The TFC is not determined by the MAC itself but selected from an available TFC set (TFCS) that the RRC layer informs. That is, the RRC informs the MAC of an available TFCS for one CCTrCH in an initial setting, and then the MAC selects a suitable TFC from the TFCS at each TTI.

Selection of a suitable TFC from a given TFCS at each TTI is a function performed by the MAC, which includes two steps.

First, the MAC constitutes a valid TFC set in the TFCS assigned to CCTrCH, and selects an appropriate TFC in the valid TFC set. The valid TFC set is a set of TFCs actually available for a corresponding TTI among assigned TFCS. The selection of a suitable TFC is take into account a channel environment changing at every moment. When a TFC is selected to be used in the corresponding TTI in the valid TFC set, the MAC selects a TFC on the basis of a priority of the logical channel. That is, the MAC selects a TFC that can transmit preferentially data of the logical channel with a higher priority, and such TFC selection is related to the priority processing function.

As for the RACH or CPCH, the common transport channel of the uplink, because one transport channel constitutes one CCTrCH, the term of the TF selection is used for the channels.

### 5           3. Identification

The MAC requires an identification function. The reason is because, first, the common transport channel is shared for use by several UEs, so each UE needs to be identified, and second, each logical channel needs to be identified due to the logical channel multiplexing. Accordingly, the MAC  
10 inserts four types of fields into a header of the MAC PDU for identification as shown in Figure 4. The fields of the MAC header do not necessarily exist, and their existence is determined depending on a mapping relation of the logical channel and the transport channel.

The identification of the terminal is required when the dedicated  
15 logical channel such as DCCH or DTCH is mapped to a common transport channel such as RACH, FACH, CPCH (Control Physical Channel), DSCH or USCH (Uplink Shared Channel). For identification of each UE, the MAC adds a radio network temporary identity (RNTI), identification information of a terminal, to a UE-ID field of the header and transmits it. The RNTI includes  
20 U-RNTI (UTRAN RNTI), C-RNTI (Cell RNTI) and DSCH-RNTI, so the MAC also adds a UE-ID type field indicating which RNTI is used and transmits it.

Identification of the dedicated logical channels is made through a C/T field. The reason is because, first, unlike other logical channels, several

dedicated channels can be mapped to one transport channel, and second, the dedicated logical channel is processed in an MAC-d of a serving radio network controller (SRNC) and other logical channels are provided in an MAC-c/sh of a control radio network controller (CRNC). Dedicated logical channels mapped to one transport channel respectively have a logical channel identity that is used as a C/T field value. If only one dedicated logical channel exists in the transport channel, the C/T field is not used.

Figure 5 illustrates MAC header information according to a mapping relation between the dedicated logical channel and the transport channel in accordance with the conventional art.

As shown in Figure 5, the C/T field exists only when several dedicated logical channels (DCCH or DTCH) are mapped, 'N' means non-existence of a header, and '-' means there is no mapping region. In addition, because the UE-ID field exists together with the UE-ID type field at the time, so it is simply indicated by UE-ID.

#### 4. Measurement of traffic volume and transport channel type switching

In order to support the RRC in dynamically controlling a radio bearer, the MAC performs functions of measurement of a traffic volume and change of a type of a transport channel.

The measurement of traffic volume is performed on the transport channel. The MAC measures the amount of LRC buffer of every logical

channel mapped to the transport channel at each TTI and adds them to calculate a transport channel traffic volume. In this case, the traffic volume of the transport channel indicates the amount of data that the transport channel is to transmit.

5           The MAC reports the measurement result to the RRC. Unlike the measurement of the traffic volume performed at every TTI, the measurement result report is performed when a specific condition is satisfied unlike. The report type includes an event trigger method for reporting the measurement result when the measurement result exceeds a threshold value, and a  
10   periodical method for reporting the measurement result at every predetermined time.

          Upon receiving the measurement result, the RRC determines whether a current transport channel is suitable for each radio bearer, and if the current transport channel is not suitable, the RRC commands the MAC to  
15   change a transport channel of a radio bearer. Namely, the transport channel type change is a function for effectively managing a resource of the transport channel by selectively using a suitable transport channel according to the amount of given data.

          The multimedia broadcast/multicast service (MBMS) will now be  
20   described.

          The MBMS is a service for transmitting multimedia data such as audio, video or image data to plural terminals by using a uni-directional point-to-multipoint bearer service. The MBMS is divided into a broadcast mode and

a multicast mode. That is, the MBMS is divided into an MBMS broadcast service and an MBMS multicast service.

The MBMS broadcast mode is a service for transmitting multimedia data to every user in a broadcast area. The broadcast area means a broadcast service available area. One or more broadcast areas may exist in one PLMN, one or more broadcast services can be provided in one broadcast area, and one broadcast service can be provided to several broadcast areas.

The MBMS multicast mode is a service for transmitting multimedia data only to a specific user group existing in a multicast area. The multicast area means a multicast service available area. One or more multicast areas can exist in one PLMN, one or more multicast services can be provided in one multicast area, and one multicast service can be provided to several multicast areas.

In the multicast mode, a user is requested to join a multicast group to receive a specific multicast service. At this time, the multicast group refers to a user group that receives the specific multicast service, and joining refers to a behavior of being admitted to the multicast group intending for receiving the specific multicast service.

MBMS data is transmitted from the RNC to a base station and to a terminal by using services of the PDCP layer, the RLC layer, the MAC layer and the physical layer positioned at the user plane of the UTRAN protocol. That is, the MBMS data transmitted from the core network (CN) is subjected

to a header compression at the PDCP layer and transmitted as an RLC UM entity through an RLC UM SAP, and then, the RLC UM entity is transmitted to the MAC layer through the common traffic channel, the logical channel.

The MAC layer adds an MAC header to the received MBMS data and  
5 transfers it to the physical layer of the base station through the common transport channel. And then, the MBMS data undergoes coding and modulation in the physical layer and transmitted to the terminal through the common physical channel.

An MBMS RB, a radio bearer (RB) for the MBMS, serves to transmit  
10 user data of one specific MBMS service transferred from the core network to UTRAN to a specific terminal group. The MBMS RB is roughly divided into a point-to-multipoint RB and a point-to-point RB. In order to provide the MBMS service, UTRAN selects one of the two types of MBMS RBs. In order to select the MBMS RB, UTRAN recognizes the number of users of the specific  
15 MBMS service existing in one cell. UTRAN internally sets a threshold value, and if the number of users existing in a cell is smaller than the threshold value, UTRAN sets the point-to-point MBMS RB, whereas if the number of users existing in a cell is greater than the threshold value, UTRAN sets the point-to-multipoint MBMS RB.

20 The wireless system of the third generation partnership project (3GPP) proposes a downlink shared channel (DSCH) including a high speed downlink shared channel (HS-DSCH), particularly to support a packet data service.

In order for the DSCH to provide a multicast service, it should support the point-to-multipoint radio bearer, and at this time, the common logical channel such as CTCH or MTCH (MBMS Traffic Channel) should be mapped to the DSCH. In this respect, however, in the conventional art, because the DSCH transmits only data of the dedicated logical channel, a field for identifying a logical channel mapped to the DSCH is not added in the MAC header. Thus, when the common logical channel data is transmitted through the DSCH, in the case that the field indicating a type of the logical channel is not included in the MAC header in transmission of the DSCH, the terminal can not know which type of logical channel a data unit received through the DSCH belong to, and thus, there is a high possibility that a communication error occurs.

The above references are incorporated by reference herein where appropriate for appropriate teachings of additional or alternative details, features and/or technical background.

### **DISCLOSURE OF THE INVENTION**

Therefore, an object of the present invention is to provide a data transmission method capable of discriminating a type of multicast service data when the multicast service data is transmitted through a shared channel.

Another object of the present invention is to provide a data transmission method capable of providing a multicast service through a shared channel.



To achieve at least the above objects in whole or in part, there is provided a multicast service method in a wireless system in which service data of a logical channel is mapped to a common transport channel and transmitted to a terminal, including: adding a logical channel identifier to  
5 service data to be transmitted; and mapping corresponding service data to a common transport channel.

Preferably, the logical channel is a common logical channel or a dedicated logical channel, and the common logical channel can be a common traffic channel (CTCH), a common control channel, an MBMS traffic  
10 channel (MTCH), or an MBMS control channel (MCCH).

Preferably, the common transport channel is a downlink shared channel (DSCH).

Preferably, the common transport channel is a high speed downlink shared channel (HS-DSCH).

15 Preferably, the service data is multimedia broadcast/multicast service (MBMS) data.

Preferably, the service data is an MBMS protocol data unit, which is an MAC protocol data unit.

Preferably, the logical channel identifier is a target channel type field  
20 (TCTF), and the TCTF indicates whether a logical channel mapped to the common transport channel is a common logical channel or a dedicated logical channel. The logical channel identifier is added when the service data is transmitted from a medium access control (MAC) layer to a lower layer.

Preferably, the logical channel identifier is added by a common type of MAC entity such as an MAC-c/sh which manages a common radio resource of every terminal in a cell.

Preferably, the logical channel identifier is included in a header of the  
5 service data, and the header is an MAC header.

The multicast service method further includes adding a terminal identifier and an indicator indicating a type of the terminal identifier to the service data to be transmitted. The terminal identifier is an MBMS radio network temporary identifier (RNTI), a terminal group identifier, or an MBMS  
10 service identifier.

To achieve at least these advantages in whole or in parts, there is further provided a multicast service method in a wireless communication system in which service data of a common logical channel or a dedicated logical channel is mapped to a downlink shared channel (DSCH) or a high  
15 speed downlink shared channel (HS-DSCH) and transmitted to a terminal, wherein when a medium access control (MAC) transmits service data through DSCH or HS-DSCH, it also transmits an indicator indicating a type of mapping of a logical channel to the service data.

Preferably, the service data is a multimedia broadcast/multicast  
20 service (MBMS) data.

Preferably, the service data is an MBMS protocol data unit, and the MBMS protocol data unit is an MAC protocol data unit.

Preferably, the indicator is a target channel type field (TCTF).

Preferably, the MAC layer is an MAC-c/sh layer which manages a common resource of every terminal in a cell.

Preferably, the indicator is included in a header of the service data, and the header is an MAC header. The MAC header includes a terminal  
5 identifier and an indicator indicating a type of the terminal identifier.

Preferably, the terminal identifier is an MBMS radio network temporary identifier (RNTI), a terminal group identifier, or an MBMS service identifier.

To achieve at least these advantages in whole or in parts, there is  
10 further provided a multicast service method in a wireless communication system in which service received through downlink shard channel is transmitted to an upper layer of a terminal, including: reading a logical channel identifier from service data and recognizing a logical channel through which corresponding data is to be transmitted; and transmitting received data  
15 to an upper layer of a terminal through the recognized logical channel.

Preferably, the received data is multimedia broadcast/multicast service (MBMS) data.

Preferably, the logical channel identifier is a target channel type field (TCTF).

20 Preferably, if the logical channel for transmitting the service data is a common logical channel, the received data is transmitted to a resource link control (RLC) layer through the common logical channel. If the logical channel for transmitting the service data is a dedicated logical channel, the

received data is transmitted to an MAC-d layer which manages a dedicated resource through the dedicated logical channel.

Preferably, the recognizing step is performed in a common type of medium access control (MAC) layer of a terminal such as an MAC-c/sh layer.

5 To achieve at least these advantages in whole or in parts, there is further provided a multicast service method in a wireless communication system in which data received through downlink shared channel is transmitted to an upper layer of a terminal, including: reading a logical channel identifier and a terminal identifier from received data; and  
10 transmitting the received data to an upper layer through a predetermined logical channel on the basis of the read logical channel identifier and terminal identifier.

Preferably, the logical channel identifier is a target channel type field (TCTF).

15 Preferably, the terminal identifier is an MBMS radio network temporary identifier (RNTI), a terminal group identifier, or an MBMS service identifier.

Preferably, the transmitting step includes: checking whether the logical channel identifier indicates a common logical channel; checking  
20 whether the terminal identifier indicates a terminal group to which a corresponding terminal belongs; and transmitting received data to an upper layer according to the check result.

Preferably, if the logical channel identifier indicates a common logical

channel and the terminal identifier indicates a terminal group to which a terminal belongs, the received data is transmitted to a resource link control (RLC) layer through the common logical channel. If the logical channel identifier indicates the common logical channel but the terminal identifier  
5 does not indicate a terminal group to which a terminal belongs, the received data is discarded.

Preferably, if the logical channel identifier indicates a dedicated logical channel and the terminal identifier indicates a terminal group to which a terminal belongs, the received data is transmitted to an MAC-d layer. If the  
10 logical channel identifier indicates the dedicated logical channel but the terminal identifier does not indicate a terminal group to which a terminal belongs, the received data is discarded.

Additional advantages, objects, and features of the invention will be set forth in part in the description which follows and in part will become  
15 apparent to those having ordinary skill in the art upon examination of the following or may be learned from practice of the invention. The objects and advantages of the invention may be realized and attained as particularly pointed out in the appended claims.

### **BRIEF DESCRIPTION OF THE DRAWINGS**

The invention will be described in detail with reference to the following drawings in which like reference numerals refer to like elements

wherein:

Figure 1 illustrates a network structure of a general UMTS system;

Figure 2 illustrates a radio access interface protocol between the terminal and UTRAN on the basis of the 3GPP radio access network standards;

Figure 3 illustrates an example of a mapping relation between a logical channel and a transport channel at the UE;

Figure 4 illustrates a structure of MAC PDU for a point-to-point DSCH in accordance with a conventional art;

Figure 5 illustrates MAC header information according to the mapping relation of a dedicated logical channel and the transport channel in accordance with the conventional art;

Figure 6 illustrates a structure of MAC PDU for a point-to-multipoint DSCH in accordance with the present invention;

Figure 7 illustrates a structure of an common type of an MAC of CRNC for the point-to-multipoint DSCH and a multicast data processing method; and

Figure 8 illustrates a structure of an common type of an MAC of a terminal for the point-to-multipoint DSCH and a multicast data processing method.

### **MODES FOR CARRYING OUT THE PREFERRED EMBODIMENTS**

The present invention is implemented in a mobile communication system such as a UMTS (Universal Mobile Telecommunications System)

developed by 3GPP. However, the present invention can be also applied to a communication system opening in a different standard.

The present invention proposes a method in which when UTRAN transmits radio bearer data through a downlink shared channel (DSCH), the terminal determines to which logical channel it transfers the data received through DSCH. In the present invention, DSCH provides a point-to-multipoint radio bearer service as well as a point-to-point radio bearer service, and especially, transmits data of a common traffic channel such as CTCH and MTCH to a specific terminal group.

10 In order to discriminate the DSCH from that of the conventional art, in the present invention, if the DSCH is used to provide a point-to-multipoint radio bearer service, it is called a point-to-multipoint DSCH. On the other hand, if the DSCH is used to provide a point-to-point radio bearer service, it is called a point-to-point DSCH. Also, in the present invention, a DSCH  
15 includes a high speed downlink shared channel (HS-DSCH) so that a DSCH can be replaced by a HS-DSCH.

In the present invention, an indicator indicating whether corresponding data is multicast data or dedicated data is added in multicast service data and transmitted through the downlink shared channel (DSCH).  
20 The indicator is included in a header of a MAC PDU as a target channel type field (TCTF).

Preferred embodiments of the present invention will now be described.

Referring back to the conventional shared transport channel (DSCH), because it transmits only data of the dedicated logical channel, a field for identifying a type of a logical channel mapped to the DSCH is not included in the MAC header. However, in order for the DSCH to provide a multicast service as well as a dedicated service, the DSCH should support a point-to-  
5 multipoint radio bearer (RB), for which the common logical channel such as CTCH or MTCH should be mapped to DSCH.

Figure 6 illustrates a structure of the MAC PDU for the point-to-multipoint DSCH in accordance with the present invention.

10 As shown in Figure 6, the MAC PDU transmitted through DSCH consists of an MAC header and an MAC PDU. The MAC header includes TCTF, UE ID type, an MBMS identifier (m-RNTI) or the like.

The MAC header includes a TCTF field for identifying a type of a logical channel. The TCTF field indicates whether a channel mapped to  
15 DSCH is a dedicated logical channel (DTCH/DCCH) or a common logical channel (CTCH, BCCH, CCCH, MTCH, MCCH). That is, the TCTF field indicates whether multicast service data transmitted through the downlink shared channel (DSCH) is multicast data or dedicated data.

The UE ID type field indicates whether a type of a UE ID included in  
20 the MAC header is U-RNTI, C-RNTI, DSCH-RNTI or the MBMS identifier (m-RNTI).

The MBMS (m-RNTI) field indicates terminal identifier information. In general, in case of the point-to-point DSCH, DSCH-RNTI is used as a UE IE



in the MAC header, whereas in case of the point-to-multipoint DSCH, the MBMS identifier (m-RNTI) is used as the UE ID. Alternatively, instead of the MBMS identifier, an MBMS service identifier or a terminal group identifier is used as the UE ID.

5           Accordingly, UTRAN MAC attaches MAC header information to the RLC PDU transmitted through CTCH to construct a MAC PDU, that is, a transmission block, and transmits it to the physical layer through DSCH.

Figure 7 illustrates a structure of a common type of MAC of CRNC for the point-to-multipoint DSCH. The common type of MAC of CRNC  
10           supports the MBMS in UTRAN. An MAC-c/sh can be used as the common type of MAC in CRNC.

As shown in Figure 7, an RLC UM (Unacknowledged Mode) of an RLC 10 exists in every MBMS point-to-multipoint radio bearer. Different RLC UM entities transmit MBMS data having different QoS (Quality of Service).  
15           One RLC UM entity has one CTCH. In Figure 7, MTCH can be also used instead of CTCH.

Upon receiving the RLC PDU through CTCH, an MAC-c/sh 20 adds the m-RNTI and a UE ID to the RLC PDU and performs a TCTF multiplexing (steps S21, S23 and S24). At this time, a step S22 means a flow control  
20           between the MAC-c/sh and an MAC-d.

Thereafter, the MAC-c/sh performs a downlink scheduling function that suitably allocates the downlink shared channel to the terminal at every transmission time interval (TTI) and a priority handling function that transmits

data with a higher priority first (step S25). At this time, the MAC-c/sh 20 can perform the priority handling by the following three types.

1. Priority handling among MBMS multicast groups (or MBMS services)

5        2. Priority handling on one MBMS multicast group (or one MBMS service)

3. Priority handling among data in an MBMS multicast group (or MBMS service)

For instance, when data of several MBMS multicast group is  
10 transmitted through the common transport channel such as FACH, DSCH or HS-DSCH at the downlink, the MAC-c/sh 20 transmits MBMS data with a higher priority first. This is related to a dynamic scheduling function, and such a method can heighten an efficiency of a channel resource by suitably allocating the common channel to the terminal at every TTI.

15        In case that several logical channels belonging to one MBMS service or one MBMS multicast group are mapped to one transport channel, the MAC-c/sh 20 determines a priority from a logical channel priority. This is related to a transport format combination selection, and the MAC-c/sh selects a transport format combination (TFC) that can transmit data of a logical  
20 channel with a higher priority first (step S26).

The MAC-c/sh selects TFCs of data to be transmitted through the point-to-multipoint DSCH, and selects a code of a downlink for transmitting a corresponding MAC PDU, that is, a channel code of a PDSCH (Physical

Downlink Shared Channel) (physical channel) (step S27). In a specific PDSCH radio frame, the PDSCH channel code is used to transmit a corresponding MBMS service or an MBMS multicast group data.

Figure 8 illustrates a structure of a common type of MAC of a terminal for the point-to-multipoint DSCH. The common type of MAC of a terminal supports the MBMS in UE. An MAC-c/sh can be used as the common type of MAC in UE.

As shown in Figure 8, a physical layer of a terminal belonging to the MBMS multicast group first receives DSCH control information through DPCH, and then determines whether to receive DSCH during a specific radio frame depending on a content of the received DSCH control information.

If the DSCH control information informs that DSCH should be received during the specific radio frame for the MBMS service, the physical layer of the terminal receives DSCH during the specific radio frame according to the DSCH control information, decodes the MAC PDU, and transmits it to the MAC-c/sh of the terminal through the transport channel.

Then, the MAC-c/sh of the terminal demultiplexes a TCTF field from the received MAC PDU (step S43), and checks whether the information of the TCTF field inserted in the MAC PDU indicates the dedicated logical channel (DTCH or DCCH) mapping or the common logical channel (e.g., CTCH, MTCH or MCCH) mapping.

If the information of the TCTF field indicates the dedicated logical channel (DTCH or DCCH) mapping, the MAC-c/sh processes data in the

same manner as the point-to-point DSCH of the conventional art. That is, if the information of the TCTF field indicates the dedicated logical channel mapping, the MAC-c/sh of the terminal reads a UE ID from the MAC header and discriminates whether the corresponding UE ID is its own ID. If the  
5 corresponding UE ID is its own ID, the MAC-c/sh of the terminal transmits the corresponding MAC PDU to the MAC-d layer.

If the information of the TCTF field inserted in the MAC PDU indicates the common logical channel (e.g. CTCH or MTCH) mapping, the MAC-c/sh of the terminal checks whether the UE ID type field indicates  
10 inclusion of the MBMS RNTI (m-RNTI). If the UE ID type field does not indicate inclusion of m-RNTI, the MAC-c/sh discards the corresponding MAC PDU.

If, the UE ID type field indicates inclusion of m-RNTI, the MAC-c/sh  
40 reads m-RNTI from the MBMS identifier field (step S43) and checks whether the read m-RNTI indicates a multicast service that the terminal  
15 desires to receive. If the read m-RNTI does not indicate the multicast service that the terminal desires to receive, the MAC-c/sh 40 discards the corresponding MAC PDU.

If the corresponding m-RNTI indicates the multicast service that the  
20 terminal desires to receive, the MAC-c/sh 40 transmits the RLC PDU to an RLC UM entity 31 of the RLC layer 30 of the terminal through the corresponding common logical channel (CTCH) by using the logical channel type (e.g., CTCH) inserted in the corresponding MAC PDU and identification

information. That is, on the basis of the TCTF inserted in the MAC PDU and the information of the MBMS identifier field, the MAC-c/sh 40 of the terminal can recognize from which logical channel the data (MAC PDU) has been transmitted and through which logical channel the data is to be transmitted to  
5 the RLC layer of the terminal.

As so far described, the method for transmitting multicast data through a downlink shared channel of the present invention has the following advantage. That is, by including the TCTF field in the header of the MAC PDU that the DSCH transmits, when DSCH supports the point-to-multipoint  
10 radio bearer, a type of a mapped logical channel can be known. Therefore, the MAC-c/sh of the terminal that receives the DSCH data can recognize from which logical channel the data (MAC PDU) has been transmitted and through which logical channel the data is to be transmitted to the RLC layer of the terminal.

15 The foregoing embodiments and advantages are merely exemplary and are not to be construed as limiting the present invention. The present teaching can be readily applied to other types of apparatuses. The description of the present invention is intended to be illustrative, and not to limit the scope of the claims. Many alternatives, modifications, and variations  
20 will be apparent to those skilled in the art. In the claims, means-plus-function clauses are intended to cover the structure described herein as performing the recited function and not only structural equivalents but also equivalent structures.

**CLAIMS**

1. A multicast service providing method in a wireless system in which a logical channel data is mapped to a common transport channel and transmitted to a receiving end, wherein a dedicated logical channel data and a common logical channel data are transmitted by using an uni-directional shared channel, such that the dedicated logical channel data and common logical channel data can be identified at the receiving end
2. The method of claim 1, wherein the dedicated logical channel is a dedicated traffic channel (DTCH) or a dedicated control channel (DCCH).
3. The method of claim 1, wherein the dedicated logical channel data is a multimedia broadcast/multicast service (MBMS) data.
4. The method of claim 1, wherein the common logical channel is an MBMS traffic channel (MTCH) or an MBMS control channel (MCCH).
5. The method of claim 1, wherein the dedicated logical channel data and common logical channel data are identified by a logical channel identifier.
6. The method of claim 5, wherein the logical channel identifier

is a target channel type field (TCTF).

7. The method of claim 1, wherein the shared channel is a downlink shared channel (DSCH).

5

8. The method of claim 1, wherein the shared channel is a channel that transmits a data only.

9. The method of claim 1, wherein a control of the shared  
10 channel is a channel of which control information is transmitted through an associated channel.

10. The method of claim 1, wherein a data of the shared channel includes:

15 an indicator indicating a logical channel type;  
an indicator indicating a multicast service type; and  
a service data unit.

11. In a wireless communication method which a dedicated  
20 logical channel data and a common logical channel data are transmitted by using an uni-directional shared channel, wherein a data transmitted through the shared channel includes:

a first indicator indicating a logical channel type;

a second indicator indicating a multicast service type; and  
a service data unit.

12. The method of claim 11, wherein the first indicator is a target  
5 channel type field (TCTF).

13. The method of claim 11, wherein the second indicator  
includes:

a terminal identifier; and  
10 an indicator indicating a type of the terminal identifier.

14. The method of claim 13, wherein the terminal identifier is an  
MBMS radio network temporary identifier (RNTI).

15. The method of claim 11, wherein the first and second indicators  
15 are includes a header.

16. A method of providing a multicast service in a radio  
communication system, the method comprising:

20 receiving data of a dedicated logical channel having a corresponding  
first dedicated transport channel,

receiving data of a common logical channel having a corresponding  
second dedicated transport channel,




processing the dedicated logical channel data and the common logical channel data to form multiplexed data that contains an identifier to provide distinction between the dedicated logical channel data and the common logical channel data;


5           newly establishing a shared transport channel independent from the first and second dedicated transport channels; and

          transporting the multiplexed data via the newly established shared transport channel.


10           17.    The method of claim 16, further comprising a step of demultiplexing the multiplexed data received via the shared transport channel by using the identifier within the received multiplexed data.

1/6  
**FIG. 1**

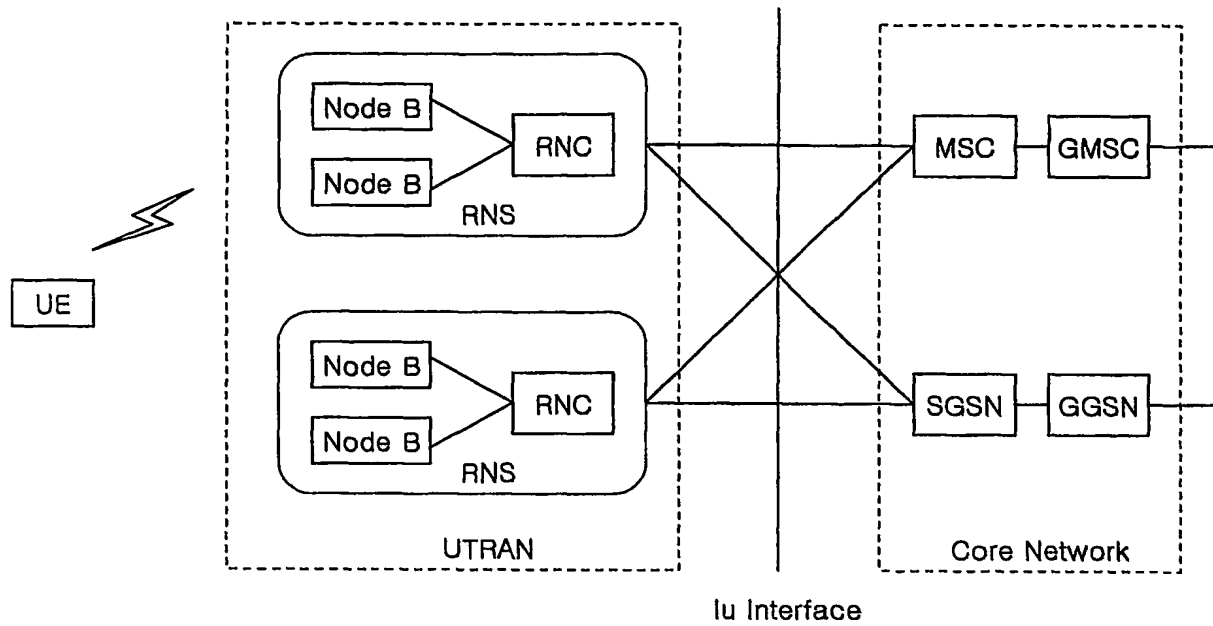


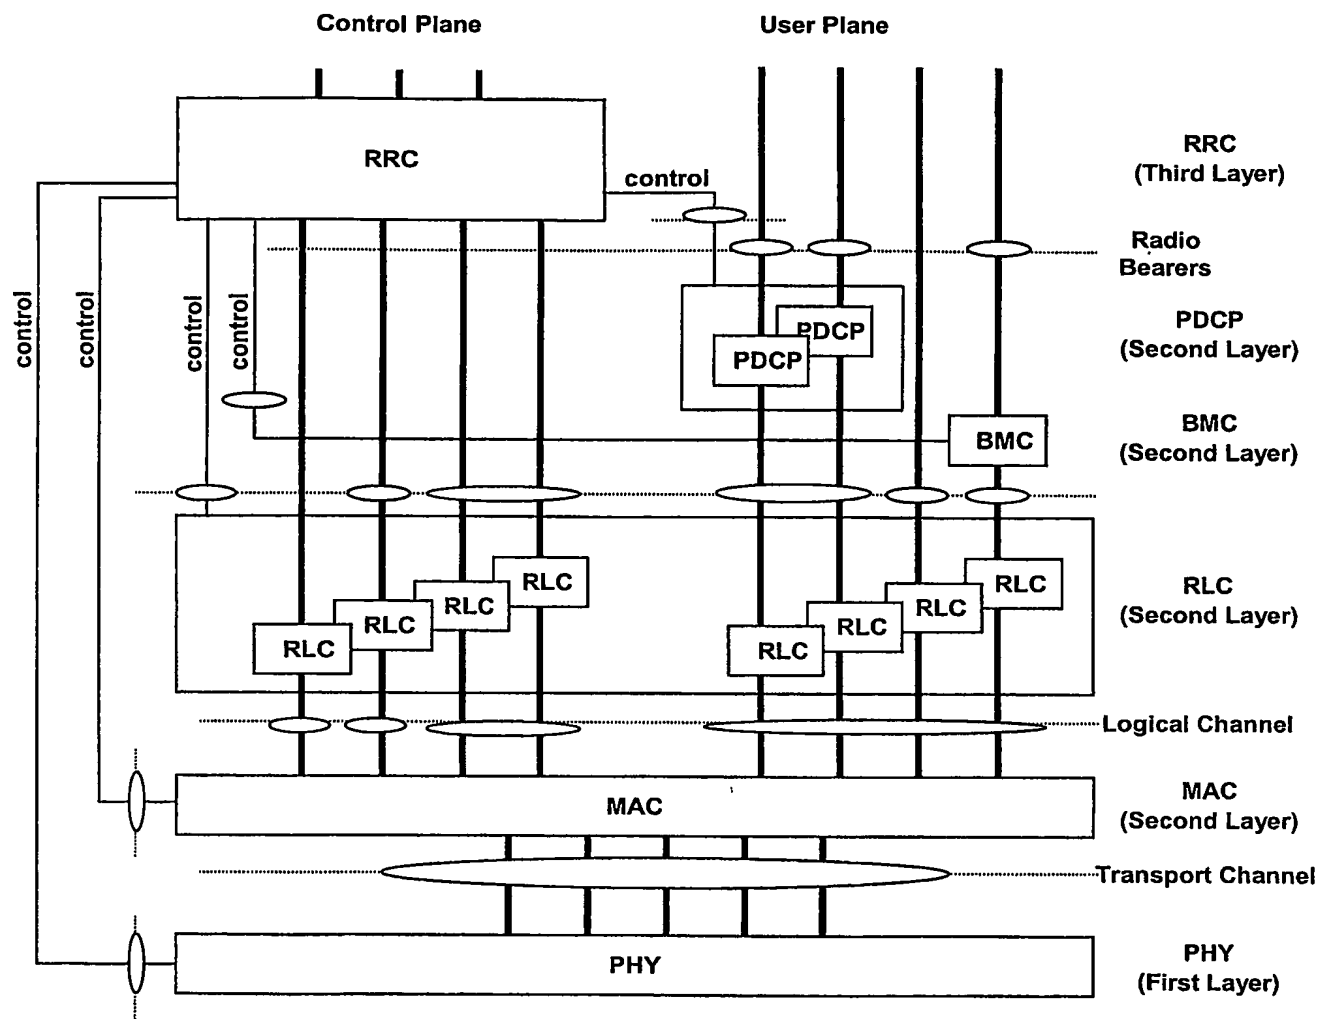2/6  
**FIG. 2**

3/6  
**FIG. 3**

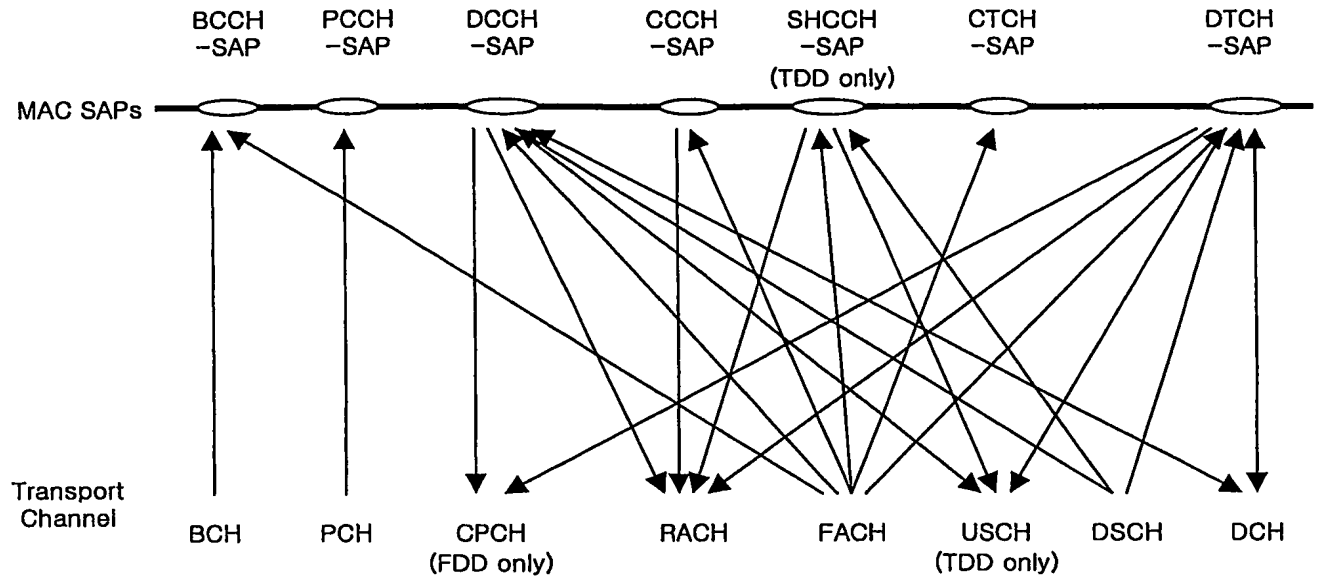


**FIG. 4**  
BACKGROUND ART

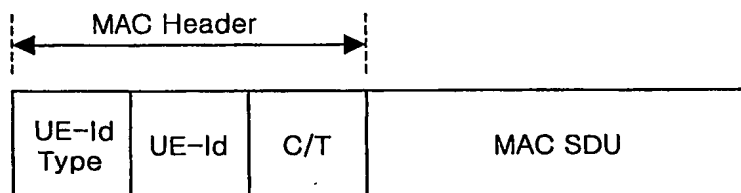


4/6  
**FIG. 5**


	DCH	RACH	FACH	DSCH	CPCH	BCH	PCH
DCCH or DTCH	C/T	TCTF UE-ID C/T	TCTF UE-ID C/T	UE-ID C/T	UE-ID C/T	—	—
BCCH	—	—	TCTF	—	—	N	—
PCCH	—	—	—	—	—		N
CCCH	—	TCTF	TCTF	—	—	—	—
CTCH	—	—	TCTF	—	—	—	—

**FIG. 6**

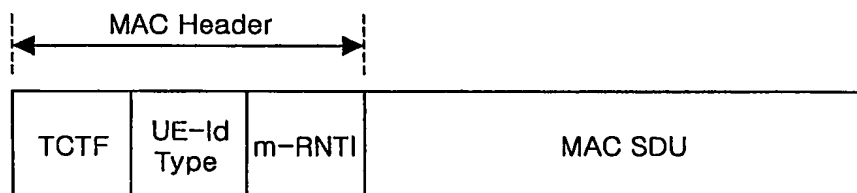

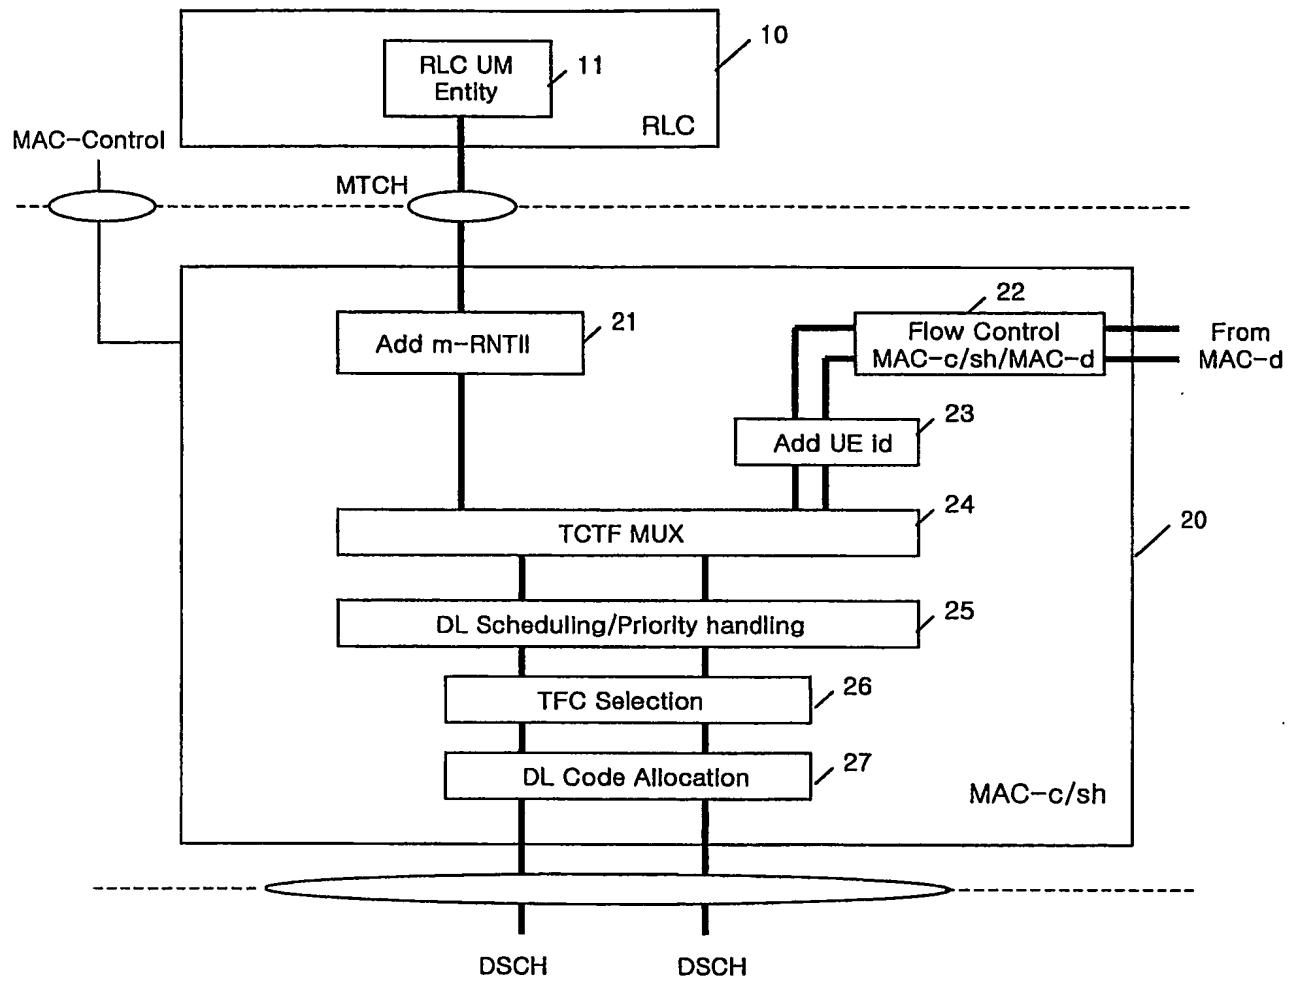5/6  
**FIG. 7**

6/6  
**FIG. 8**

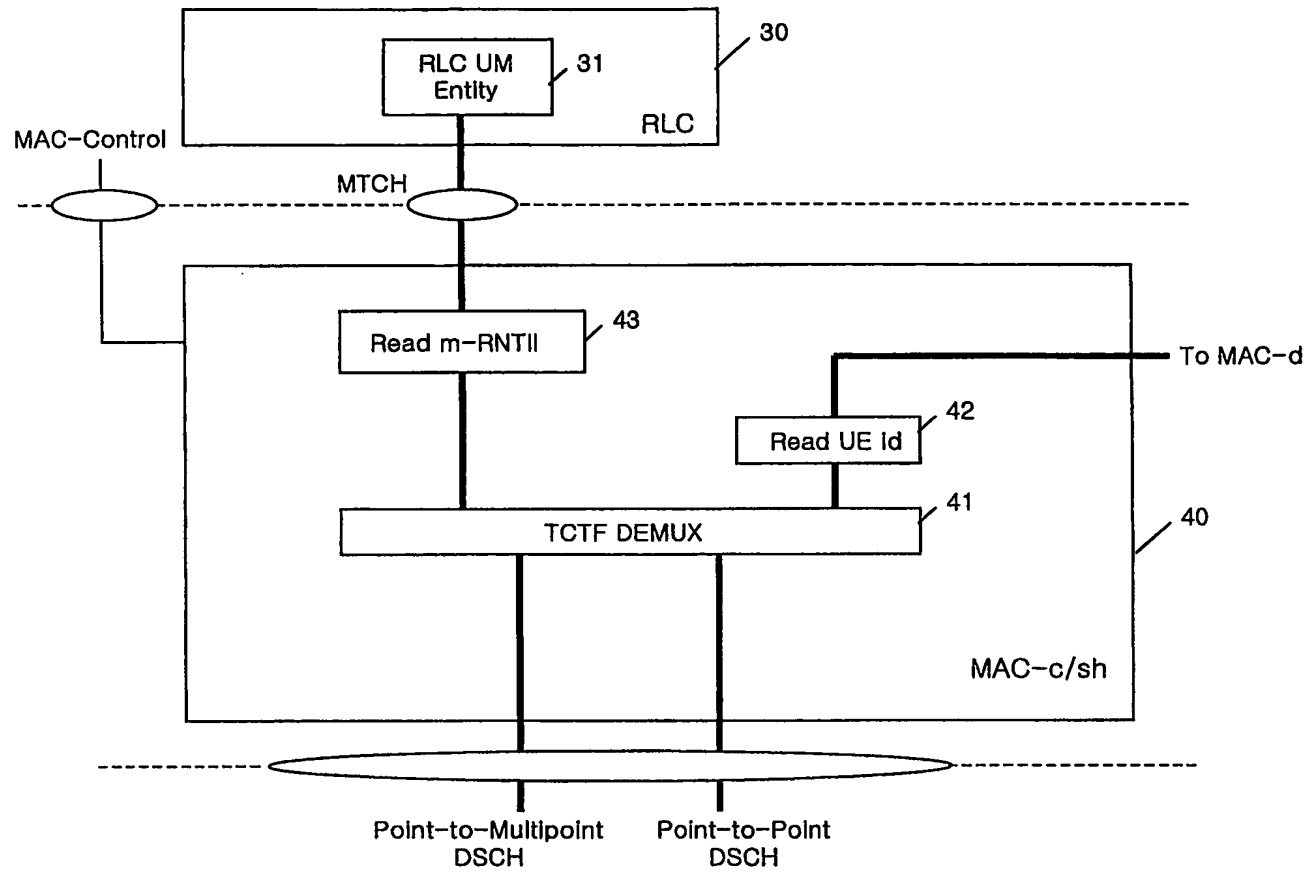

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/KR03/01919

## A. CLASSIFICATION OF SUBJECT MATTER

**IPC7 H04B 7/26**

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7 H04B 7/26 , H04B 7/212 , H04B 7/216 , H04B 1/69

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched  
KR , JP as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6,252,868 B1 ( ERICSSON TELEFON AB LM ) 26 JUNE 2001 (26.06.2001) see the claims	1
PA	KR 10-2003-15151 A ( SAMSUNG ELECTRONICS CO. LTD. ) 20 FEBRUARY 2003 (20.02.2003) see the detailed description	1
PA	KR 10-2003-32780 A ( SAMSUNG ELECTRONICS CO. LTD. ) 26 APRIL 2003 (26.04.2003) see the whole document	1 - 17
PA	KR 10-2003-29310 A ( LG ELECTRONICS CO. LTD. ) 14 APRIL 2003 (14.04.2003) see the whole document	
A	KR 10-2002-522 A ( SAMSUNG ELECTRONICS CO. LTD. ) 05 JANUARY 2003 (05.01.2003) see the whole document	1 - 17

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

26 DECEMBER 2003 (26.12.2003)

Date of mailing of the international search report

26 DECEMBER 2003 (26.12.2003)

Name and mailing address of the ISA/KR



Korean Intellectual Property Office  
920 Dunsan-dong, Seo-gu, Daejeon 302-701,  
Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

NAM, Ki Young

Telephone No. 82-42-481-5710





# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/KR03/01919

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6,252,868 B1	26.06.2001	NONE	
KR 10-2003-15151 A	20.02.2003	NONE	
KR 10-2003-32780 A	26.04.2003	NONE	
KR 10-2003-29310 A	14.04.2003	NONE	
KR 10-2002-522 A	05.01.2003	NONE	